





Product codes and descriptions


Code	Size	Description	Power Supply	Sensitivity
3897.05.00	G 3/4"	Electronic water leak detector with motorised shut-down valve ActivStopLeak ONE	24V AC / DC	0.1 l/h
3897.06.00	G 1"	Electronic water leak detector with motorised shut-down valve ActivStopLeak ONE+1	24V AC / DC	0.1 l/h
3788.06.20	G 1"	Electronic water leak detector ActivStopLeak MULTI	24V AC / DC	0.1 l/h
3897.05.10	G 3/4"	Electronic water leak detector with motorised shut-down valve and remote control and display ActivStopLeak TWO	24V AC / DC	0.1 l/h
3897.06.10	G 1"	Electronic water leak detector with motorised shut-down valve and remote control and display ActivStopLeak TWO+1	24V AC / DC	0.1 l/h



3897.05.00



3788.06.20

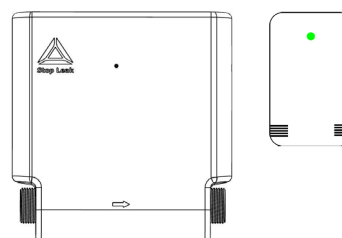



3897.05.10
with remote control & display

Technical information

Technical	Information
Sensitivity	0.1 l/hr
Response time	Programmable
Allowable flow time limits	Programmable
Minimum and Maximum operating temperature range	- 10C to + 60C
Ingress protection (IP) rating - Sensor	IP 68
Ingress protection (IP) rating - Electronics	IP 54
Power Supply (Adapter / Transformer 230V - 12V AC / DC not supplied)	12V / 24V AC / DC
Absorbed power	0.5W / 1VA
Bluetooth® Low Energy (BLE) transmission LoRa® (3897.OX.10)	*

Dimensions

A (mm)	B (mm)	G (mm)	H (mm)	H ₁
183.5	60	EG 3/4 "UNI ISO 228 120	193.5	215
191.5	60	G 1 "UNI ISO 228 120	196.5	215

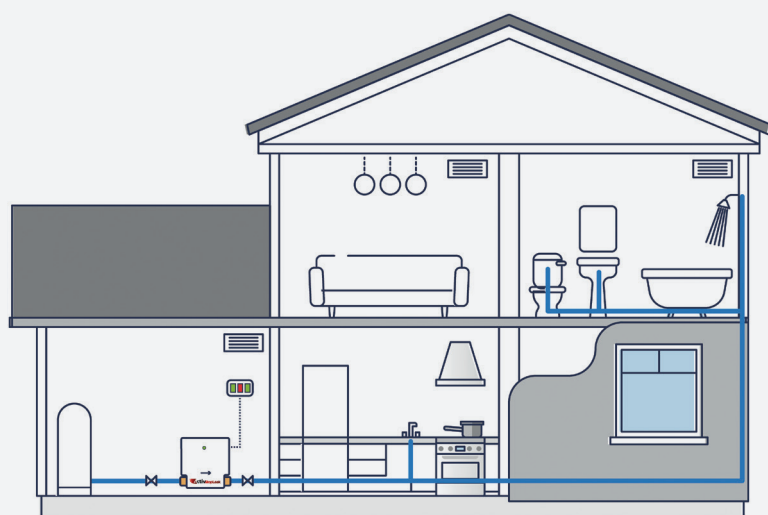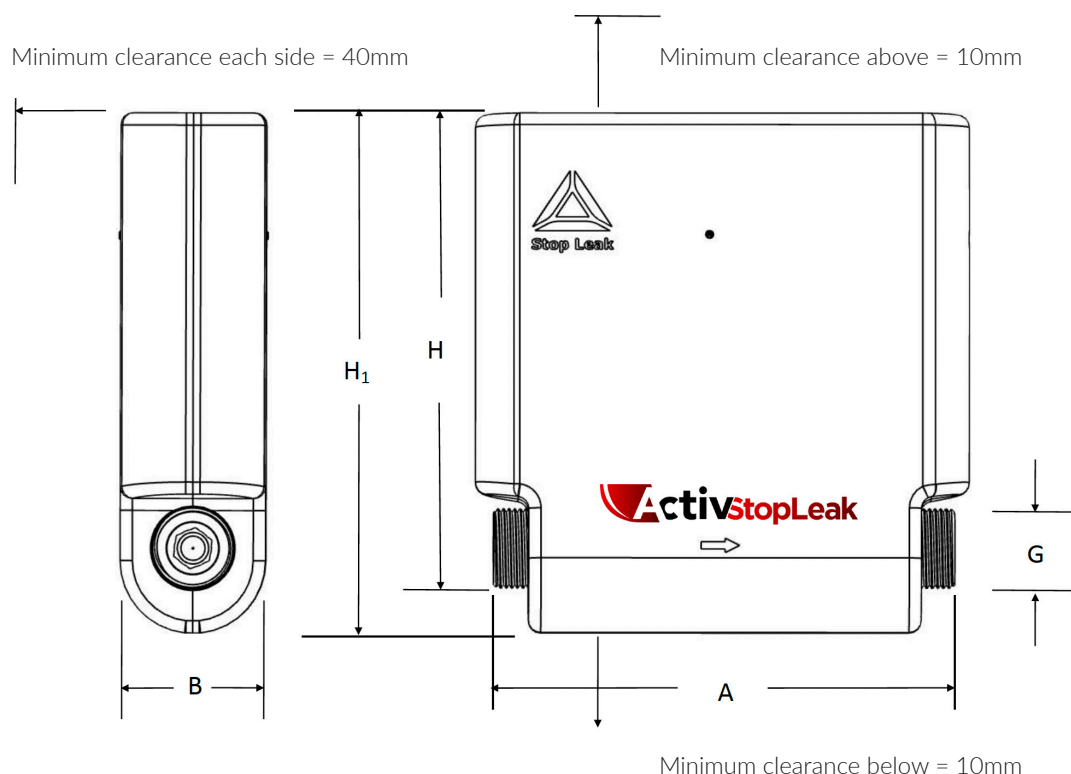

Plumbing

Fitted BEFORE StopLeak

- Isolation valve
- 500 micron strainer
- Water Meter
- Fire sprinkler connection
- Water softener
- Mains stopcock
- Cold water storage tank

Fitted AFTER StopLeak

- Isolation valve
- Activflo water conditioner
- In-line filtration products
- ALL taps
- All showers



Activ-Tec Limited

Airfield Industrial Estate, Hixon, Staffordshire ST18 0PF
t. 01889 272180 f. 01889 272181 e. sales@activ-tec.co.uk www.activ-tec.com/.co.uk



Proud to be a leading British Brand